


W2700 BIO – 3000 GPD MICROFAST® 3.0 OR HIGH STRENGTH FAST® 3.0 TANK SPECIFICATIONS

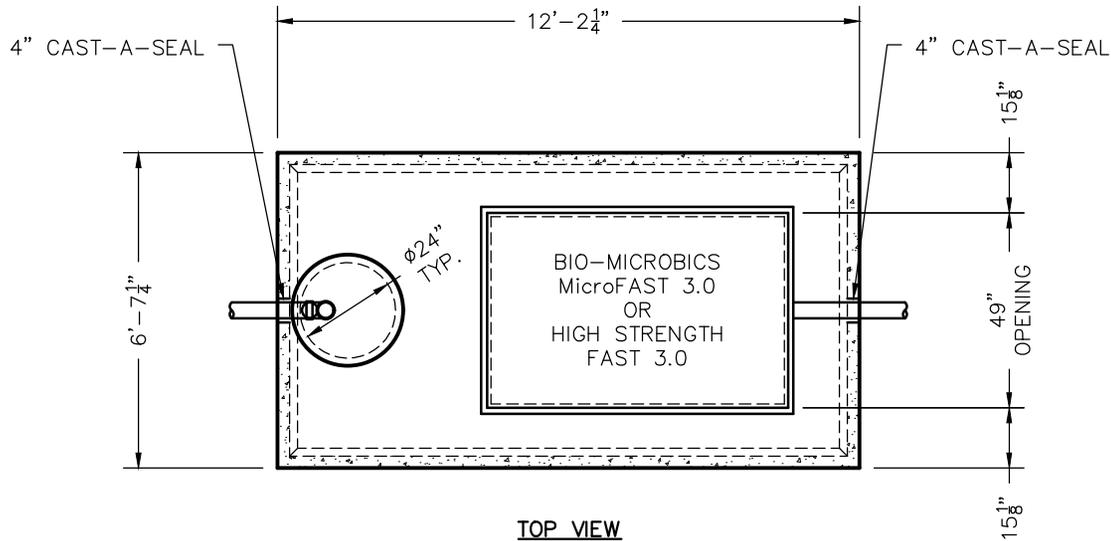

DIMENSIONS:

- WALL: 3"
- BOTTOM: 3"
- COVER: 5 1/2"
- MANHOLE: 24" I.D. PRECAST CONCRETE RISER
- HEIGHT: 82 1/8" O.D.
- LENGTH: 12'-2 1/4" O.D.
- WIDTH: 6'-7 1/4" O.D.
- BELOW INLET: 75" O.D.
- LIQUID LEVEL: 64"
- WEIGHT: BOTTOM 15,065 LBS.
COVER 5,030 LBS.

INLET AND OUTLET:

4" CAST-A-SEAL BOOT OR EQUAL GASKET

INLET AND OUTLET Baffle AND FILTER:

AS SHOWN

LIQUID CAPACITY: 42.46 GAL/IN

TANK LOADING DESIGN: 8'-0" UNSATURATED SOIL

BIO UNIT LOADING DESIGN:


4'-0" UNSATURATED SOIL

COVER: MIX DESIGN #8 (NO FIBER)

TANK: MIX DESIGN #9 (SMALL FIBER)

CUSTOMIZED TANKS:

FOR CUSTOM TANKS CONTACT WIESER CONCRETE

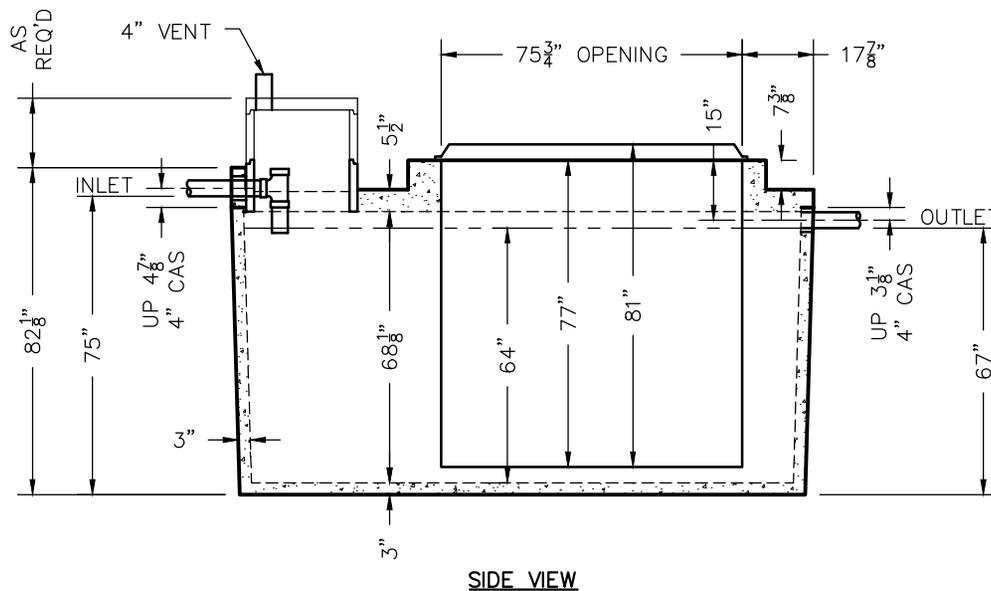

TANKS ARE MANUFACTURED TO MEET OR EXCEED ASTM C-1227 REQUIREMENTS

**DRAWINGS SUBMITTED
FOR APPROVAL**

APPROVED BY: _____
 APPROVAL DATE: _____
 PRODUCTS NEEDED BY: _____

PRE-POUR:		DATE:		WIESER CONCRETE W3716 US HWY 10, MAIDEN ROCK, WI 54750 800-325-8456
REV.	SCALE: 1/4" = 1'-0"	DRAWN BY: WCP	DATE: 00/00/00	
POST-POUR:				
W2700 BIO HS FAST 3000 SEPTIC MANUAL				SHEET NO. 1 OF 1