


TOP VIEW

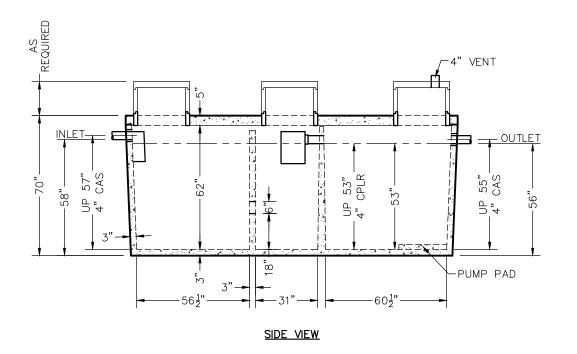

W1500/1000-FDL TRIPLE TANK SPECIFICATIONS

DIMENSIONS: WALL: 3"

> **BOTTOM: 3"** COVER: 5"

MANHOLE: 24" I.D. PRECAST CONCRETE RISER

HEIGHT: 70" O.D. LENGTH: 13'-10" O.D. WIDTH: 6'-9" O.D. BELOW INLET: 58" O.D. LIQUID LEVEL: 53" WEIGHT: 18,500 LBS.

INLET AND OUTLET:

4" CAST-A-SEAL BOOT OR EQUAL GASKET

INLET AND OUTLET BAFFLE AND FILTER: WISCONSIN, SEE DETAIL #10 (OTHER STATES SEE CHART)

LIQUID CAPACITY: 18.97 GAL/IN (SEPTIC) 9.98 GAL/IN (SEPTIC) 19.54 GAL/IN (SEPTIC)

LOADING DESIGN: #'-0" UNSATURATED SOIL

TANK CAN BE USED AS: SEPTIC/SPTIC, SEPTIC/PUMP OR SEPTIC/SIPHON

COVER: MIX DESIGN #8 (NO FIBER) TANK: MIX DESIGN #9 (SMALL FIBER)

CUSTOMIZED TANKS:

FOR CUSTOM TANKS CONTACT WIESER CONCRETE

REVIEWED BY	
REVIEW DATE	_

DRAWINGS SUBMITTED FOR APPROVAL

APPROVED BY:	
APPROVAL DATE:	

PRODUCTS NEEDED BY:

ESTER COLL US HWY 10, MAIDEN ROCK,		WI 5475
US HWY 10,		MAIDEN ROCK,
TMH SN	司	10,
S	ħ	ΗM
	Ш	NS

DRAWN BY: WCP

DATE:

SEPTIC MANUAL 500-1000

FP

TRIPLE

SHEET NO. OF

TANKS ARE MANUFACTURED TO MEET OR EXCEED ASTM C-1227 REQUIREMENTS