



W2000-MR BIO 1500 GPD MICROFAST® 1.5 OR HIGH STRENGTH FAST® 1.5 TANK SPECIFICATIONS

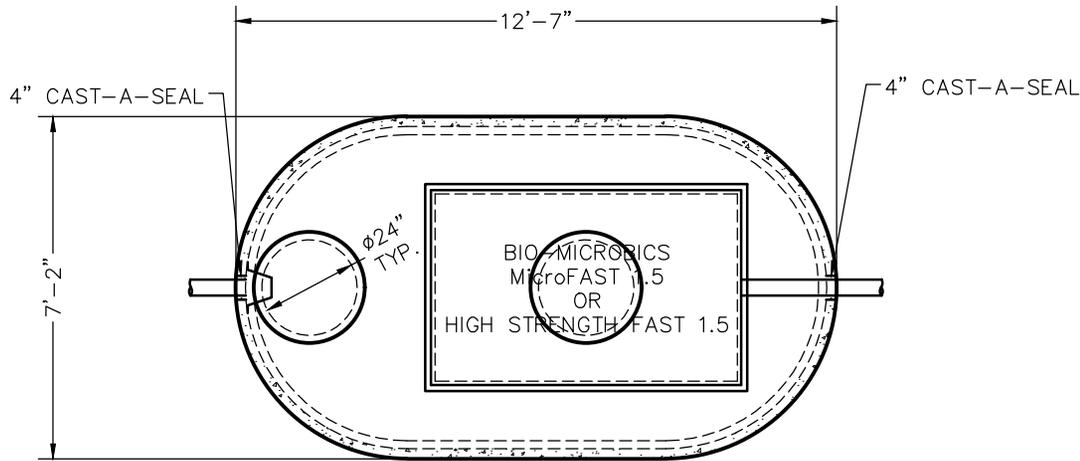

TOP VIEW

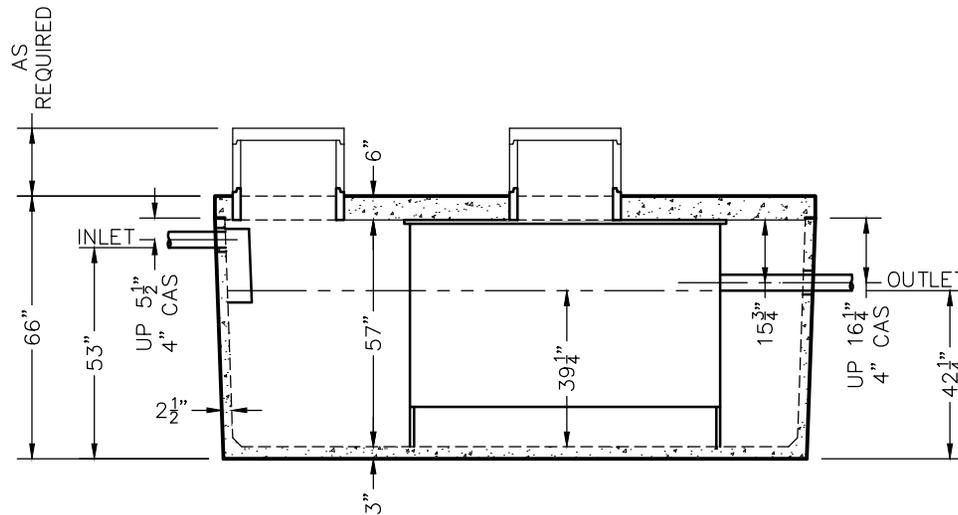

SIDE VIEW

DIMENSIONS:

- WALL: 2 1/2"
- BOTTOM: 3"
- COVER: 6"
- MANHOLE: 24" I.D. PRECAST CONCRETE RISER
- HEIGHT: 66" O.D.
- LENGTH: 12'-7" O.D.
- WIDTH: 7'-2" O.D.
- BELOW INLET: 53" O.D.
- LIQUID LEVEL: 39 1/4"
- WEIGHT: BOTTOM 7,600 LBS.
COVER 5,940 LBS.

INLET AND OUTLET:

4" CAST-A-SEAL BOOT OR EQUAL GASKET

INLET Baffle:

AS SHOWN

LIQUID CAPACITY: 42.92 GAL/IN

LOADING DESIGN: 8'-0" UNSATURATED SOIL

COVER: MIX DESIGN #8 (NO FIBER)

TANK: MIX DESIGN #10 (STRUCTURAL FIBER)

CUSTOMIZED TANKS:

FOR CUSTOM TANKS CONTACT WIESER CONCRETE

REVIEWED BY _____
REVIEW DATE _____

**DRAWINGS SUBMITTED
FOR APPROVAL**

APPROVED BY: _____
APPROVAL DATE: _____
PRODUCTS NEEDED BY: _____

TANKS ARE MANUFACTURED TO MEET OR EXCEED ASTM C-1227 REQUIREMENTS

PRE-POUR:		DATE:		WIESER CONCRETE w3716 US HWY 10, MAIDEN ROCK, WI 54750 800-325-8456
REV.	SCALE: 1/4" = 1'-0"	DRAWN BY: WCP	DATE: 00/00/00	
POST-POUR:				
W2000-MR BIO HS FAST 1500 SEPTIC MANUAL				
				SHEET NO. 1 OF 1