



W2000-MR BIO-1500 GPD MICROFAST® 1.5 OR HIGH STRENGTH FAST® 1.5 TANK SPECIFICATIONS

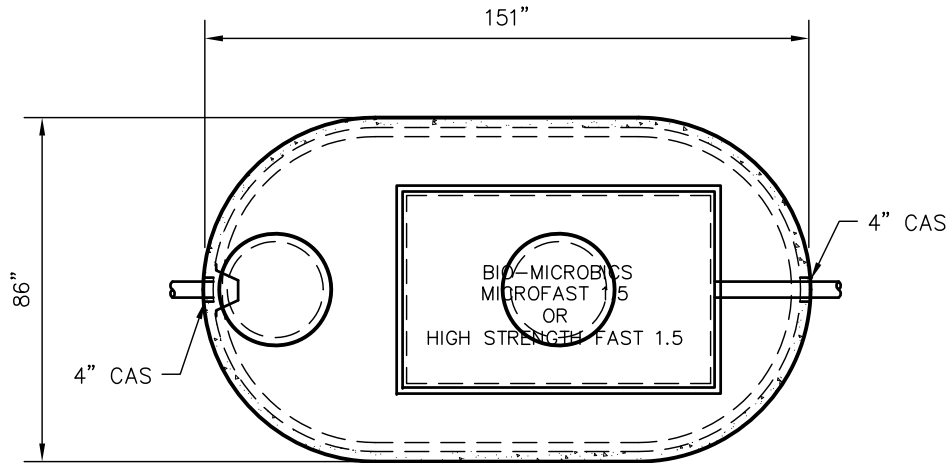

TOP VIEW

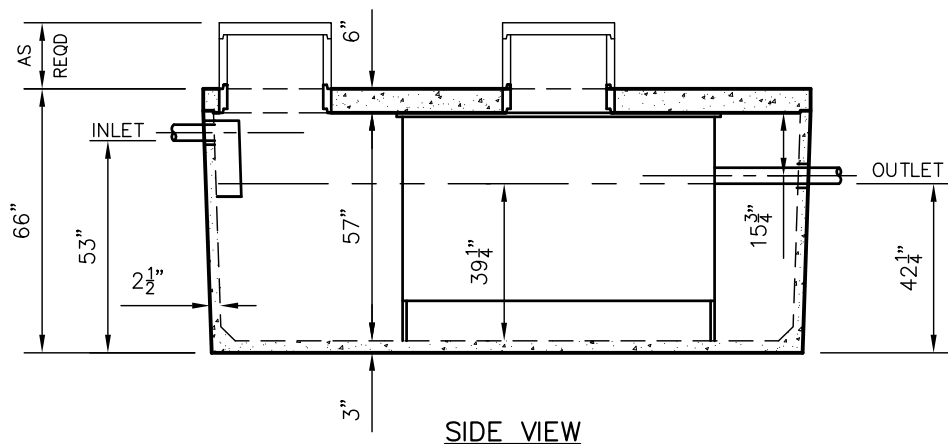

SIDE VIEW

DIMENSIONS:

WALL: 2-1/2"
 BOTTOM: SEPTIC-3"
 COVER: 6"
 MANHOLE: 24" I.D. PRECAST CONCRETE RISER
 HEIGHT: 66" O.D.
 LENGTH: 151" O.D.
 WIDTH: 86" O.D.
 BELOW INLET: 53" O.D.
 LIQUID LEVEL: 39 1/4"
 WEIGHT: 13,540 LBS.-SEPTIC

INLET AND OUTLET:
 4" CAST-A-SEAL (CAS) BOOT OR EQUAL

INLET AND OUTLET Baffles:
 AS SHOWN

LIQUID CAPACITY: 42.92 GAL/IN

LOADING DESIGN: 8' 0" UNSATURATED SOIL

COVER: MIX DESIGN #8 (NO FIBER)
 TANK: MIX DESIGN #10 (STRUCTURAL FIBER)

CUSTOMIZED TANKS:
 FOR CUSTOM TANKS CONTACT WIESER CONCRETE

**DRAWINGS SUBMITTED
FOR APPROVAL**

APPROVED BY: _____
 APPROVAL DATE: _____
 PRODUCTS NEEDED BY: _____

TANKS ARE MANUFACTURED TO MEET OR EXCEED ASTM C-1227 REQUIREMENTS

PRE-FOUR:

SCALE: 1/4"=1'-0"

DRAWN BY: WCP

WIESER CONCRETE

W2000-MR BIO 1500 GPD

SHEET NO. 1 OF 1

POST-POUR:

REV. DATE:

DATE: 00/00/00

W3716 US HWY 10 MAIDEN ROCK, WI 54750

SEPTIC MANUAL

800-325-8456

FILE: W2000-MR BIO MICROFAST OR HS FAST 1500