
## 13'-10" 4" CAST-A-SEAL 4" CAST-A-SEAL FILTER OR BAFFLE

## TOP VIEW

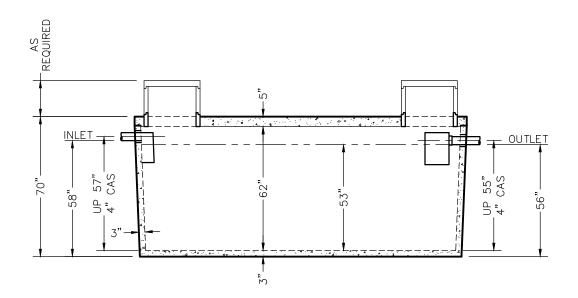

SIDE VIEW

## WLP2500-FDL TANK SPECIFICATIONS

DIMENSIONS:

WALL: 3"
BOTTOM: 3"
COVER: 5"

MANHOLE: 24" I.D. PRECAST CONCRETE RISER

HEIGHT: 70" O.D. LENGTH: 13'-10" O.D. WIDTH: 6'-9" O.D. BELOW INLET: 58" O.D. LIQUID LEVEL: 53" WEIGHT: 18,000 LBS.

INLET AND OUTLET:

4" CAST-A-SEAL BOOT OR EQUAL GASKET

INLET AND OUTLET BAFFLE AND FILTER: WISCONSIN, SEE DETAIL #10 (OTHER STATES SEE CHART)

LIQUID CAPACITY: 49.17 GAL/IN

HOLDING TANK:

OUTLET HOLE PLUGGED

ACTUAL CAPACITY: 2,704 GALLONS

LOADING DESIGN: 8'-0" UNSATURATED SOIL

TANK CAN BE USED AS:

SEPTIC / HOLDING / PUMP OR SIPHON

COVER: MIX DESIGN #8 (NO FIBER)
TANK: MIX DESIGN #9 (SMALL FIBER)

**CUSTOMIZED TANKS:** 

FOR CUSTOM TANKS CONTACT WIESER CONCRETE

| REVIEWED BY |  |
|-------------|--|
| REVIEW DATE |  |

## DRAWINGS SUBMITTED FOR APPROVAL

| APPROVED BY: |        |     |
|--------------|--------|-----|
| APPROVAL     | DATE:  |     |
| PRODUCTS     | NEEDED | BY: |

SHEET NO.

1

OF

1

W3716

SEPTIC MANUAL

DATE:

TANKS ARE MANUFACTURED TO MEET OR EXCEED ASTM C-1227 REQUIREMENTS